


FRONT VIEW / WINDWALL

* UP TO 22' (6.7m) WITH EXTENSION FOR BANNERS
 ** T1 CLEARANCE, SEE "RIGGING PLAN"

Stageline SAM 340

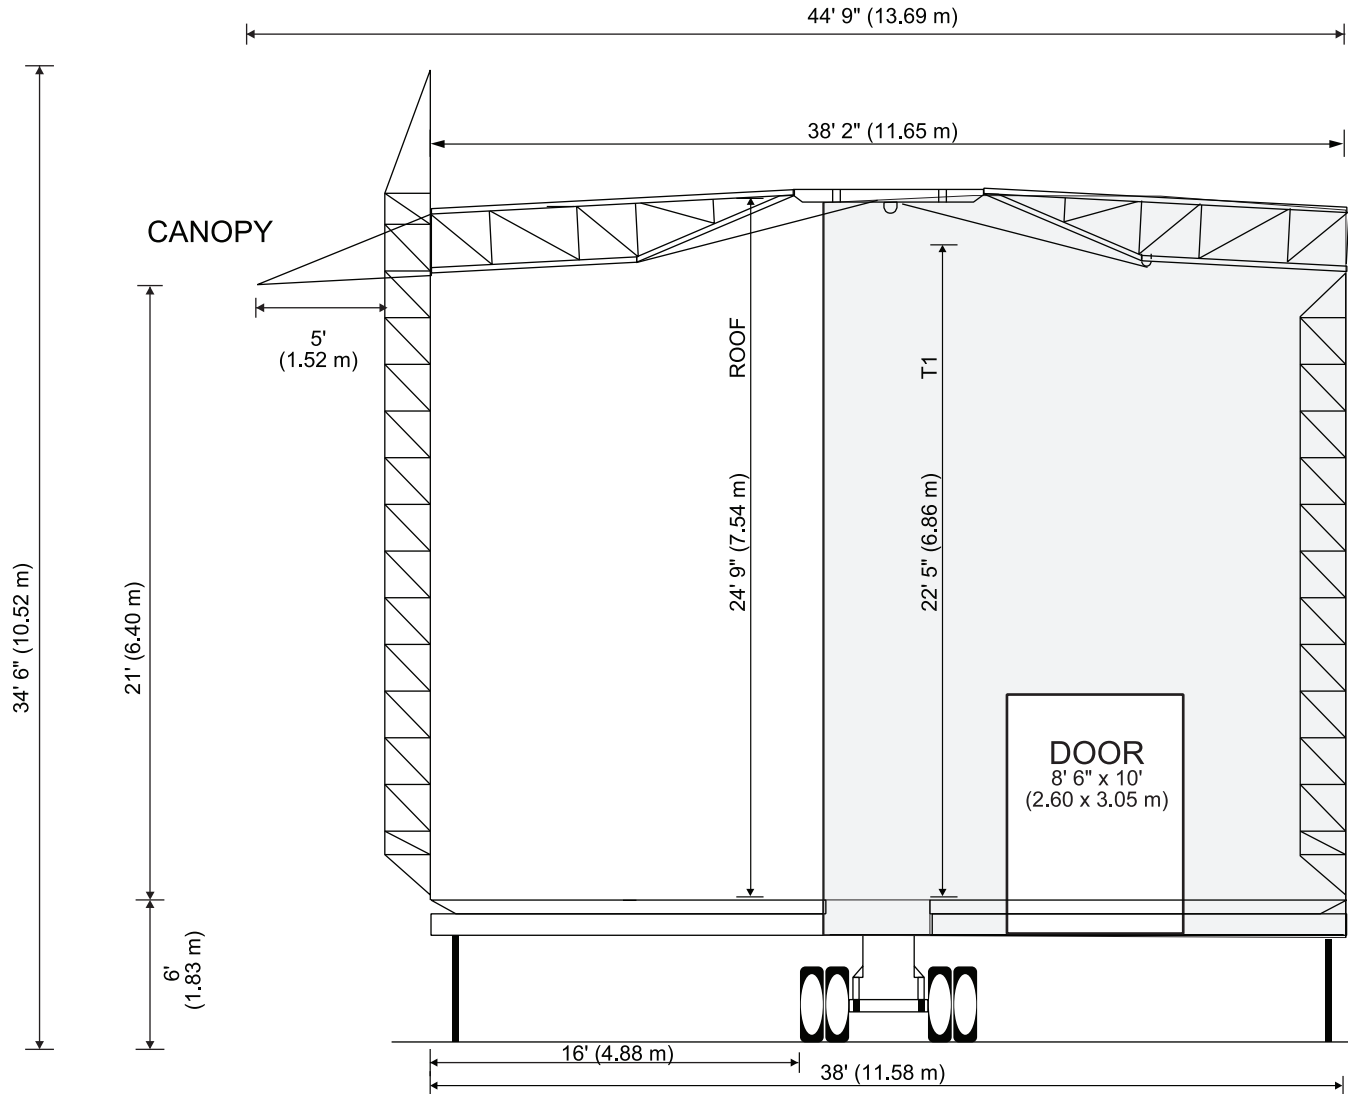

SIDE VIEW / WINDWALL


Stage specifications subject to change without notice
 Figures are within inch or cm to actual size

©1999 – All rights reserved Stageline Mobile Stage inc®. Any and all forms of adaptation or reproduction of this document including plans and drawings found herein, in whole or in part, is strictly forbidden without the written authorisation of Stageline Mobile Stage inc®.

Date : 00-06-07
 Ref no : D09-V-341-A
 Revision 5



Stageline SAM 340

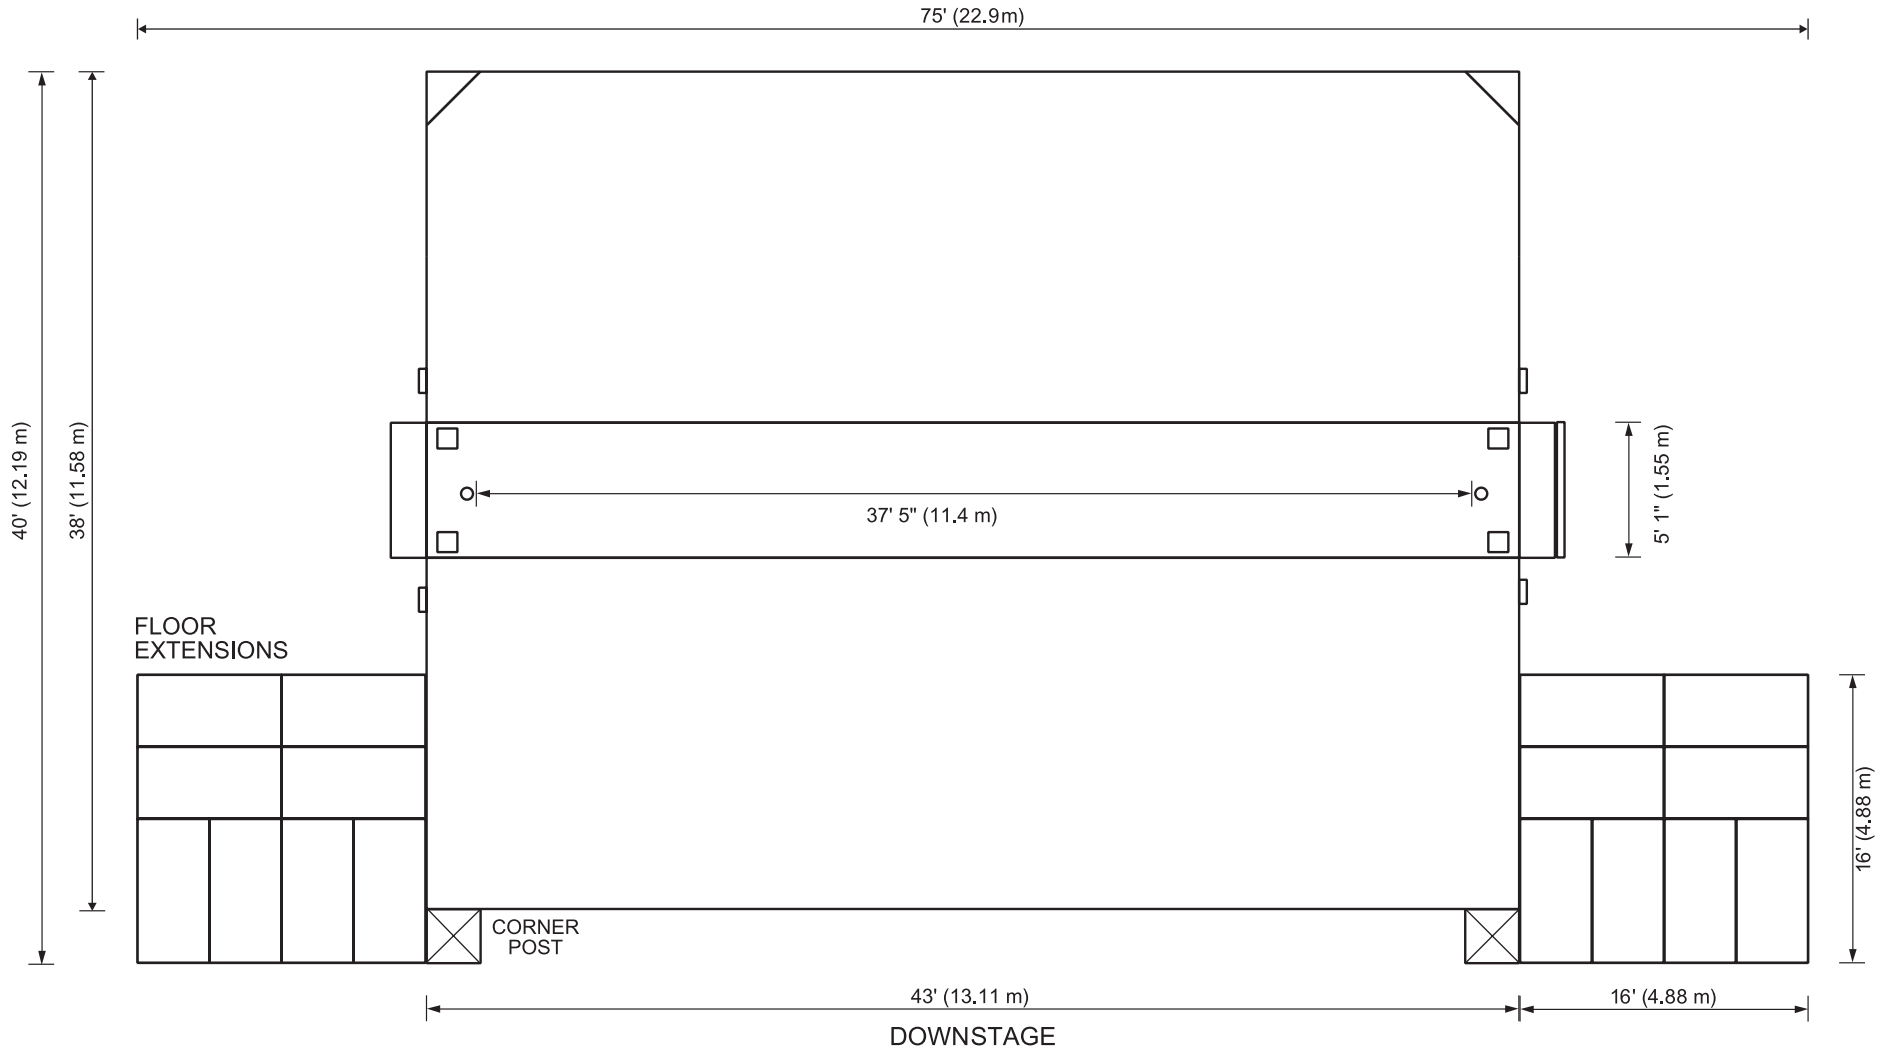


CAPACITY: 100 lb / ft² (490 kg / m²)

FLOOR VIEW

Stage specifications subject to change without notice
Figures are within inch or cm to actual size

©1999 – All rights reserved Stageline Mobile Stage inc. Any and all forms of adaptation or reproduction of this document including plans and drawings found herein, in whole or in part, is strictly forbidden without the written authorisation of Stageline Mobile Stage inc.

Date: 2013-10

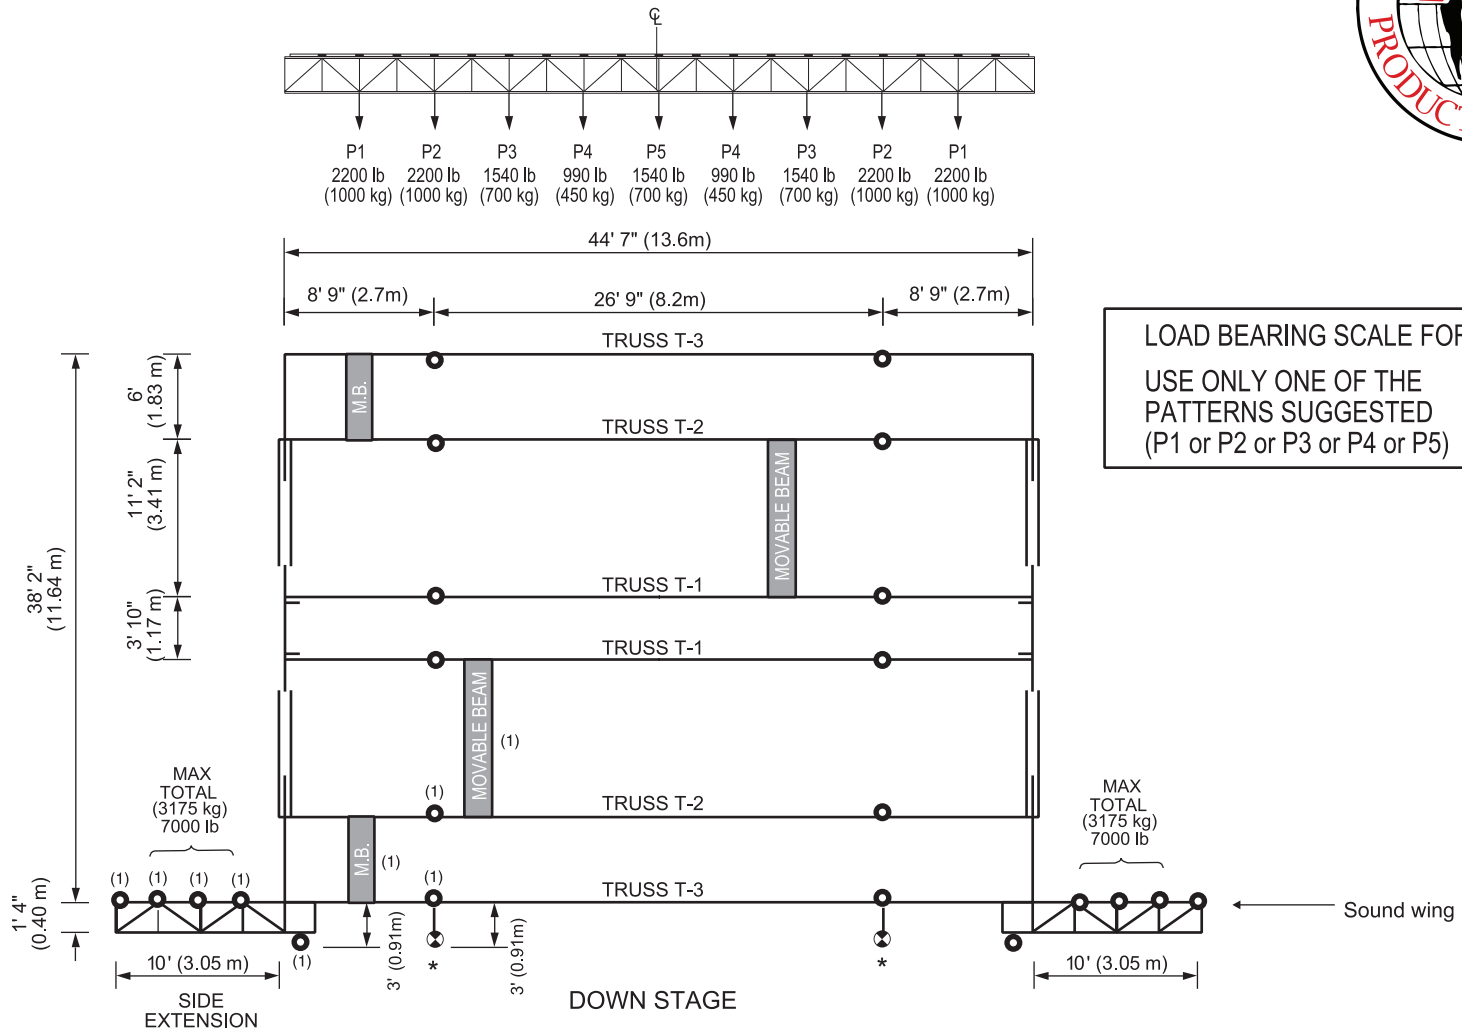

- RIGGING POINT: 2200 lb (1000 kg)
- ⊙ RIGGING POINT*: 1000 lb (450 kg)
- * THIS LOAD CANNOT BE RIGGED CONCURRENTLY WITH ANY LOAD ON TRUSS T3.

(1) The sum of all rigging points marked with (1) cannot exceed 9 000 lb (4090 kg) on each sides

MOVABLE BEAMS 6 MOVABLE RIGGING BEAMS MAX. 2200 lb (1000 kg) (each) STAGE LEFT/RIGHT
 - MAXIMUM LOAD BEARING CAPACITY: ROOF: 16 000 lb (7 300 kg)
 TRUSSES: 4400 lb (2000 kg) (each)

RIGGING PLAN